

## 2V 2/2 Solenoid Valve



### ◆ Specifications

Model	2V025-06	2V025-08	2V130-10	2V130-15	2V250-20	2V250-25
Fluid	Air, Water, Oil					
Action	Direct acting, normally closed		Internally pilot acting, normally closed			
Type of actuation	2 port 2 position					
Orifice size	2.5mm		13mm		25mm	
Cv	0.23		6.2		23	
Port size	1/8	1/4	3/8	1/2	3/4	1
Viscosity limit	Under 20CST					
Operating pressure range	Air, Water, Oil:0~1.0 MPa		Air, Water, Oil:0.05~1.0 MPa			
Proof pressure	1.5 MPa					
Ambient and fluid temperature	-10~80℃(No freezing)					
Allowable voltage range	AC: -20%~+10% of rated voltage    DC: -15%~+10% of rated voltage					
Protect	IP65					
Power consumption	AC220V: 4.5VA    DC24V: 5.0W					
Insulation	F Class					
Material of body	Brass with zinc plated		Brass			
Seal material	VITON		NBR			
Min.actinationg time secretary	0.05					

### ◆ How to Order

2V 025 - 06 - AC110V

#### Rated voltage

DC12V		DC24V		AC24V	50/60Hz
AC 110V	50/60Hz	AC220V	50/60Hz	AC380V	50/60Hz

#### Port size

06	1/8	08	1/4	10	3/8
15	1/2	20	3/4	25	1

#### Orifice size

025	2.5mm	130	13mm	250	25mm
-----	-------	-----	------	-----	------


#### Model

2V	2 port 2 position solenoid valve (DIN socket type)
----	--


For high temperature, please contact us

◆ Dimensions

2V025-06  
2V025-08

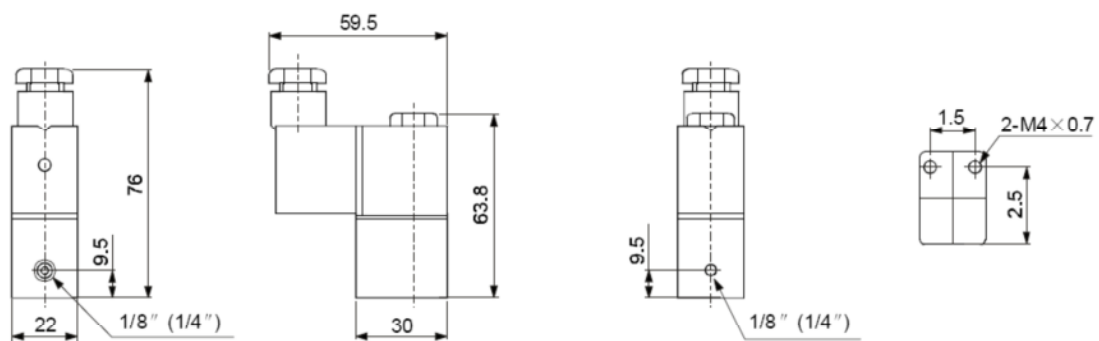

2V130-10  
2V130-15

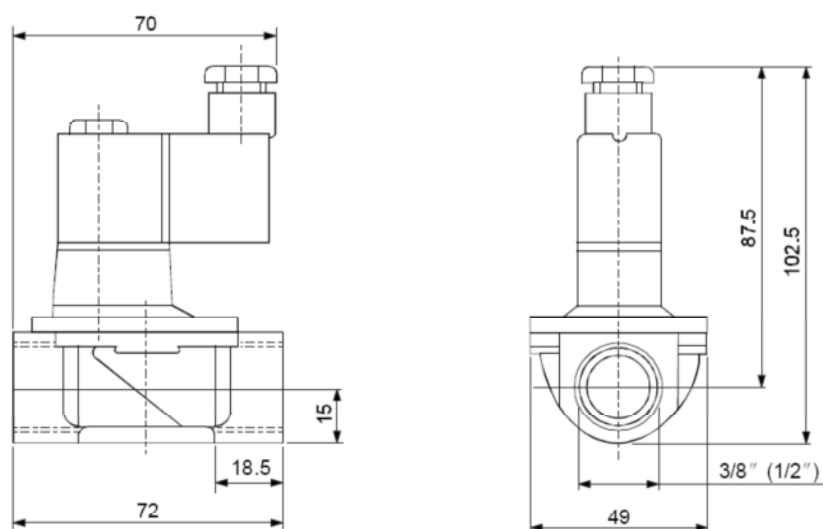

2V250-20  
2V250-25

