

2W 2/2 Solenoid Valve



Specification:

Model	2W025-06	2W025-08	2W040-10
Fluid	Air, Water, Oil		
Action	Direct acting, normally closed		
Type of actuation	2 port 2 position		
Orifice size	2.5mm		4mm
Cv	0.23		0.60
Port size	1/8	1/4	3/8
Viscosity limit	Under 20CST		
Operating pressure range	Air, Water, Oil: 0~0.7 MPa		
Proof pressure	1.08 MPa		
Ambient and fluid temperature	-5~80 °C (No freezing)		
Allowable voltage range	± 10% of rated voltage		

Ordering Code:

2W 025 -08 -DC24V-E

① ② ③ ④ ⑤


①Model		②Orifice Size		③Port		④Voltage		⑤Seal Type	
2W	2/2 Solenoid Valve	2W, 2S		06	1/8"	DC12V		Blank	NBR
	Brass Body	025	2.5mm	08	1/4"	DC24V		E	EPDM
2S	2/2 Solenoid valve	040	4mm	10	3/8"	AC24V			V
	Stainless Steel	2WH, 2SH				AC110V		VITON: high temperature, gas, vacuum	
2WH	High Pressure					AC220V			
	Brass Valve					AC380V			
2SH	High Pressure*					012	1.2mm		
	Stainless Steel Valve	020	2mm						

*For high pressure, Operating Pressure:0~2.0Mpa, Proof Pressure:3.5Mpa


*For high Temperature: 0~180°C

Dimension

2W, 2WH, 2S, 2SH-06

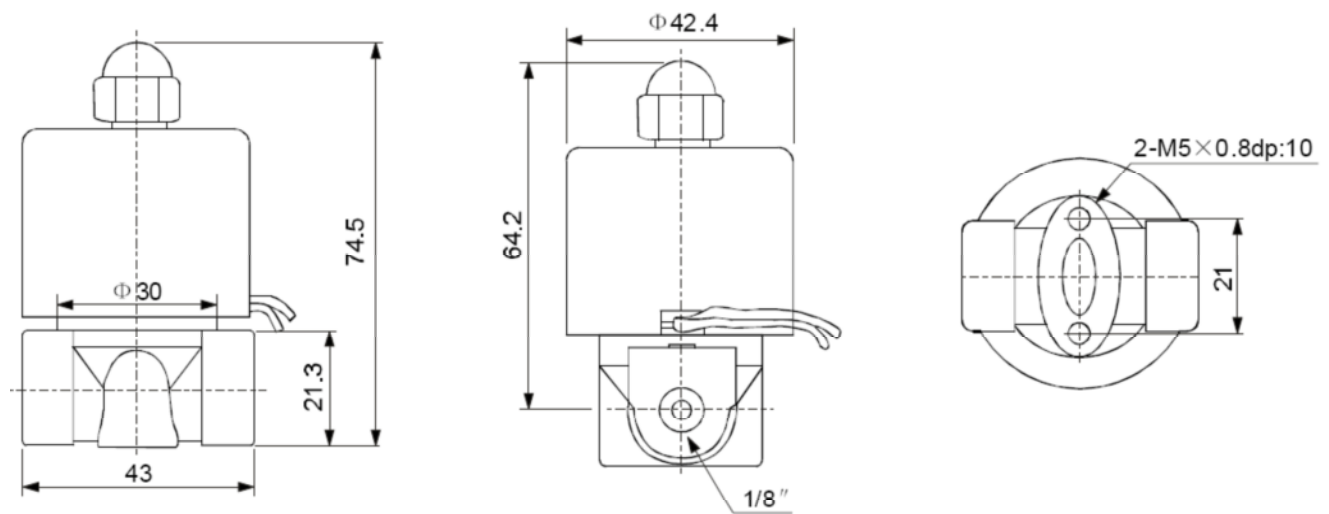

2W, 2S, 2WH, 2SH-08

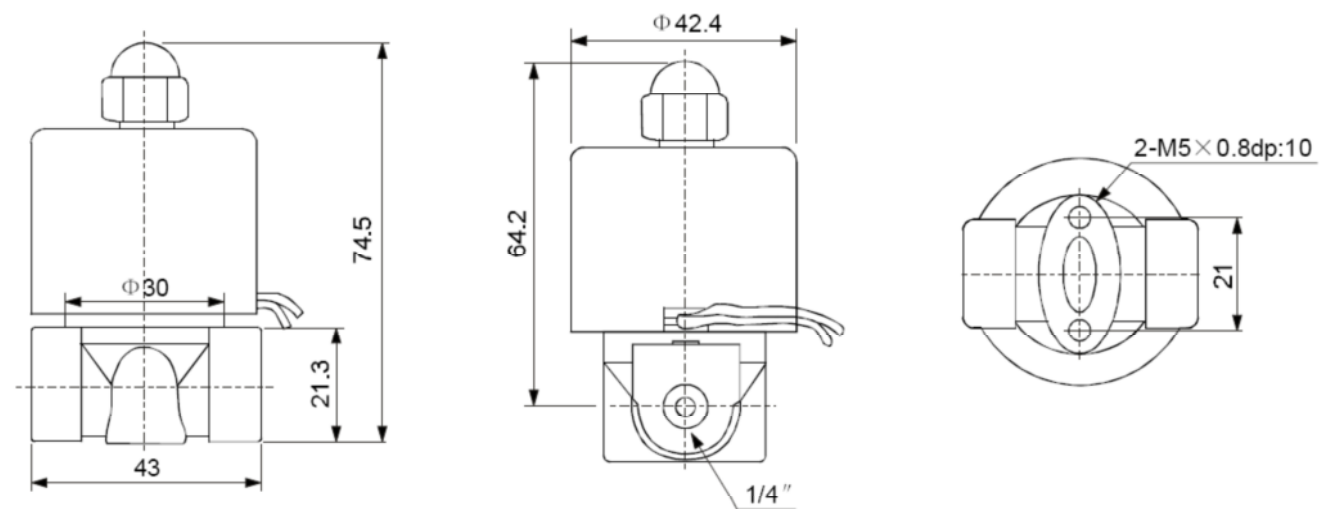

2W, 2S, 2WH, 2SH-10

